

Fast Recovery Diode Module

Reverse Voltage 1200V


Forward Current 200 Amp

Features

- Ultrafast Reverse RecoveryTime
- Soft Reverse Recovery Characteris
- Low Reverse Recovery Loss
- High System Power Density

Applications

- Inversion Welder
- Power Factor Correction(PFC)Circuit
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper

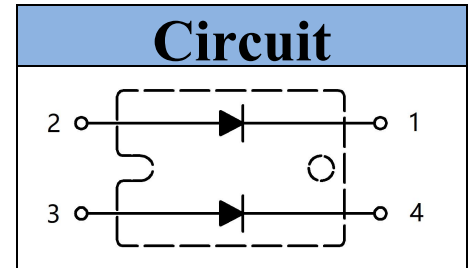

Maximum Ratings

Symbol	Item	Conditions	Values	Unit
V_R	Maximum D.C. Reverse Voltage		1200	V
V_{RRM}	Maximum Repetitive Reverse Voltage			
I_{FAV}	Average Forward Current	Rectangular , $d=0.5$, $T_c=73^\circ C$, Per Leg	100	A
		Rectangular , $d=0.5$, $T_c=73^\circ C$, Per Module	200	
I_{FRMS}	RMS Forward Current	$T_c=73^\circ C$, Per Leg	141	A
I_{FSM}	Non-Repetitive Peak Surge Current	$T_j = 25^\circ C$, $t = 50Hz(10ms)$, $V_R = 0V$, Per Leg	1400	A
I^2t	Circuit Fusing Consideration	$t = 10ms$ $T_j = 25^\circ C$	9800	A ² s
P_{tot}	Total Power Dissipation	$T_j = 25^\circ C$	357	W
V_{ISO}	Isolation Breakdown Voltage	AC 50Hz/60Hz; R.M.S; 1min	3000	V
T_j	Operating Junction Temperature		-40 to +150	°C
T_{stg}	Storage Temperature		-40 to +125	°C
M_t	Mounting Torque	To Terminals(M4)	0.7~1.1	N·m
M_s		To Heatsink(M4)	0.7~1.1	
Weight	Module (Approximately)		34	g

Thermal Characteristics

Symbol	Item	Conditions	Values	Unit
$R_{th(j-c)}$	Thermal Impedance, Max	Junction to Case(Per Leg)	0.35	°C/W
$R_{th(c-s)}$	Thermal Impedance, Max	Case to Heat Sink	0.1	°C/W

Electrical Characteristics

Symbol	Item	Conditions	Values			Unit
			Min.	Typ.	Max.	
V_{FM}	Forward Voltage Drop Per Leg, Max	$T_j = 25^\circ C$, $I_f=100A$	—	—	2.1	V
I_{RRM}	Repetitive Peak Reverse Current Per Leg, Max	$T_j = 25^\circ C$ $V_R = V_{RRM}$	—	—	0.5	mA
		$T_j = 150^\circ C$ $V_R = V_{RRM}$	—	—	10	

Symbol	Item	Conditions	Values			Unit
			Min.	Typ.	Max.	
t_{rr}	Typical Reverse Recovery Time Per Leg	$I_F = 0.5A, I_R = -1A, I_{RR} = -0.25A$	—	90	—	ns
t_{rr}	Reverse Recovery Time	$I_F=100A, V_R=600V, di_F/dt = -200A/\mu s, T_j = 25^\circ C$	—	130	—	ns
I_{RM}	Maximum Reverse Recovery Current	$T_j = 25^\circ C$	—	10	—	A
t_{rr}	Reverse Recovery Time	$I_F=100A, V_R=600V, di_F/dt = -200A/\mu s, T_j = 125^\circ C$	—	260	—	ns
I_{RM}	Maximum Reverse Recovery Current	$T_j = 125^\circ C$	—	25	—	A
V_{T0}	Threshold Voltage, for power loss calculation only	$T_j = 125^\circ C$	1.20			V
r_T	Slope Resistance, for power loss calculation only	$T_j = 125^\circ C$	5.0			mΩ

Performance Curves

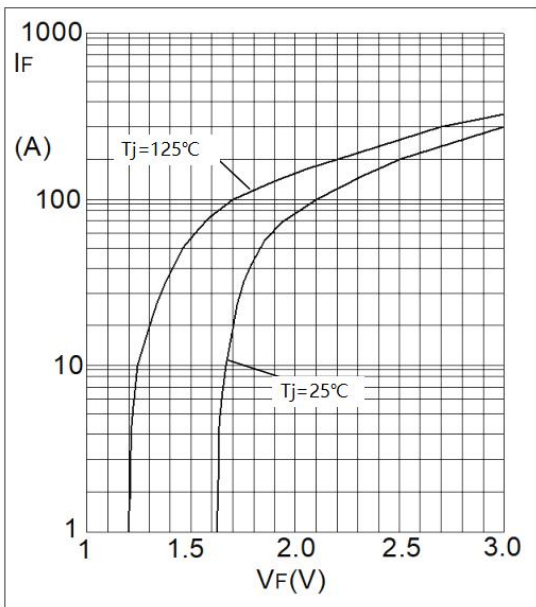


Fig1. Forward Characteristics

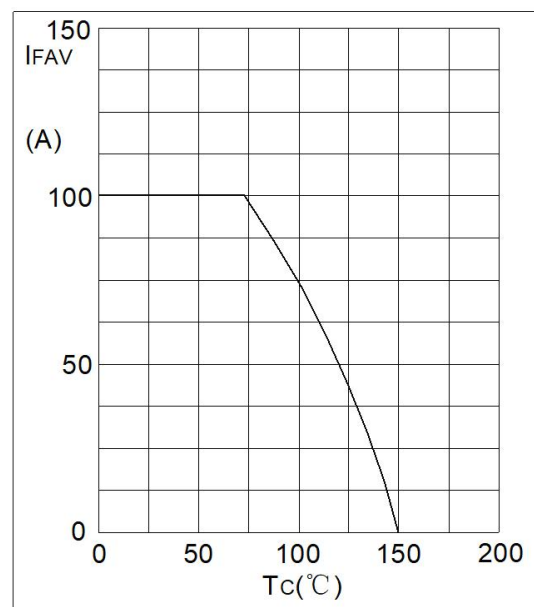


Fig2. Forward Current Derating Curve

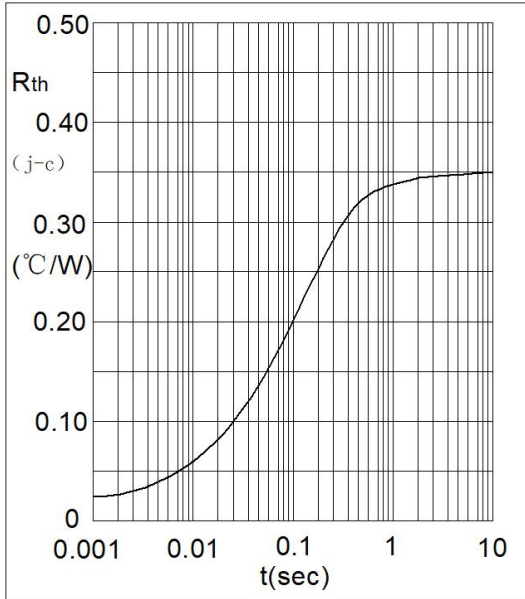


Fig3. Transient Thermal Impedance

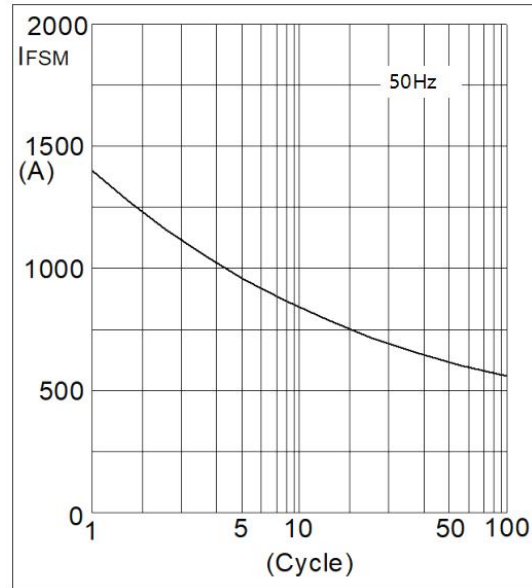


Fig4. Max Non-Repetitive Forward Surge Current

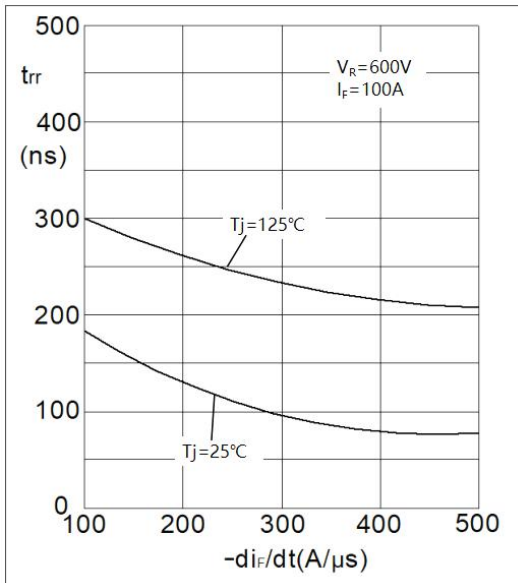


Fig5. Reverse Recovery Time VS di_F/dt

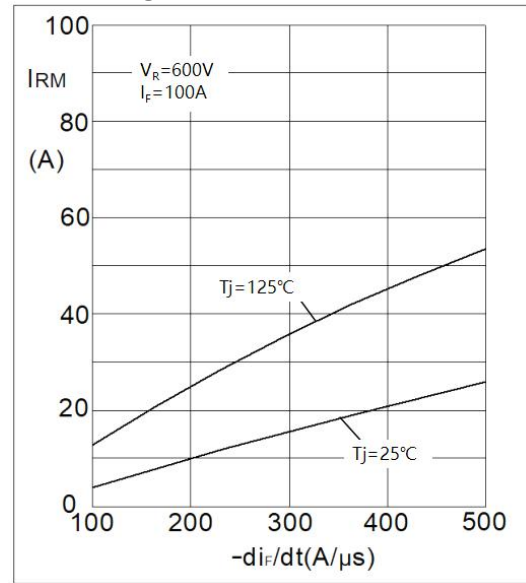


Fig6. Reverse Recovery Current VS di_F/dt


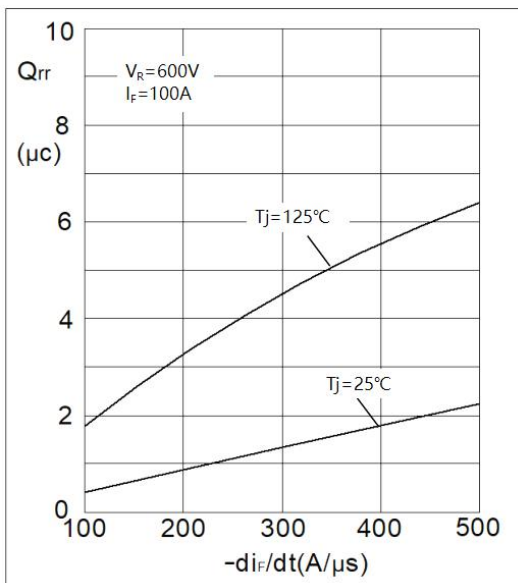


Fig7. Reverse Recovery Charge VS di_F/dt

Package Outline Information

CASE: M58

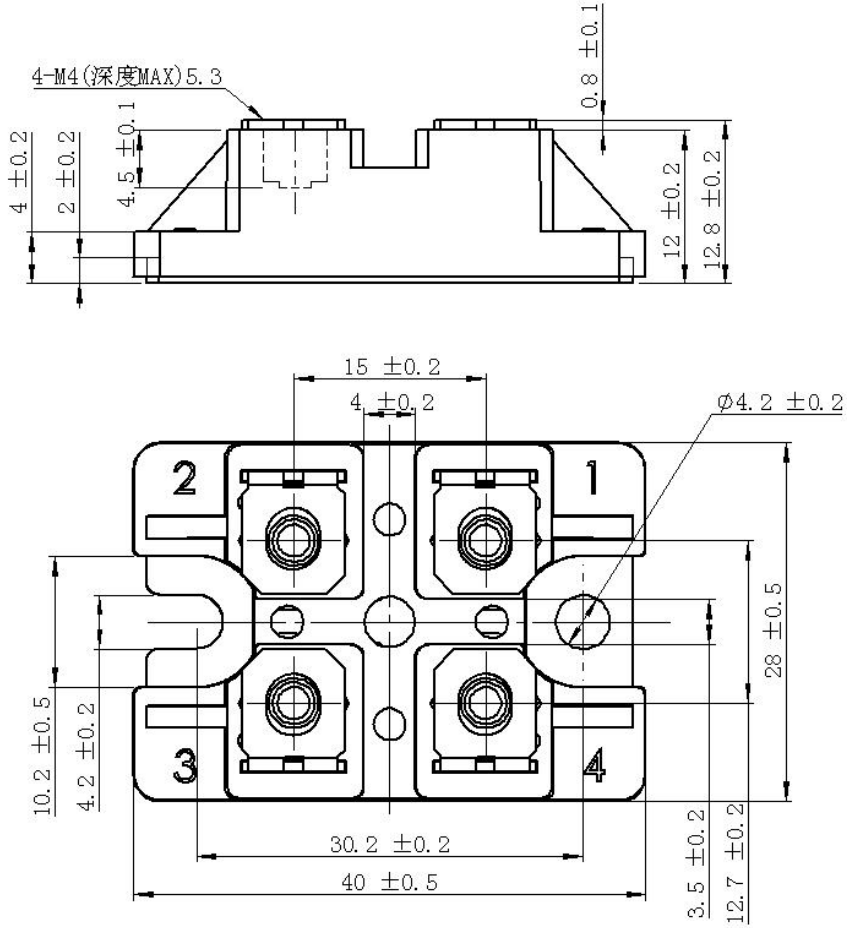

Dimensions in mm

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of Zhejiang Guchi Electronics Co., Ltd. products may not be considered as a guarantee or assurance of product characteristics. The specifications describe only the usual characteristics of products expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance, and application adjustments may be necessary. The user of our products is responsible for the safety of their applications embedding our products and must take adequate safety measures to prevent the applications from causing physical injury, fire, or other problems if any of our products become faulty. The user is responsible for ensuring that the application design complies with all applicable laws, regulations, norms, and standards. Except as otherwise explicitly approved by Zhejiang Guchi Electronics Co., Ltd. in a written document signed by authorized representatives, our products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

No representation or warranty is given, and no liability is assumed with respect to the accuracy, completeness, and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. Zhejiang Guchi Electronics Co., Ltd. does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets, or other intellectual property rights, nor the rights of others. We make no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact the nearest sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. We reserve the right to make changes.